


High Definition, High Brightness and Flexible Installation for 24/7 Operation



Bright 700 cd/m2 image is clear even in brightly lit areas

4 times the pixel resolution of Full-HD, showing lifelike images with incredible realism.



Built-in media player provides 4K signage without a separate PC

By utilizing a commercially available USB drive, 4K still images or videos can easily be displayed without the need of a PC.


USB Memory Slot



Attach the included cover to prevent theft of a USB memory drive.

Flexible installation

PN-HS series supports Landscape/Portrait/Face-up/Face-down/Tilt-forward/Tilt-backward installation.

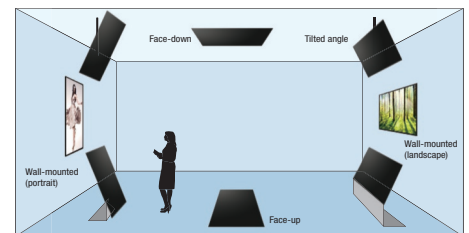


Specifications

Model Name		PN-HS551	PN-HS501	PN-HS431
Installation		Landscape / Portrait / Face-up / Face-down / Tilt-forward / Tilt-backward		
LCD Panel		55" class (54 5/8" diagonal) TFT LCD	50" class (49 1/2" diagonal) TFT LCD	43" class (42 1/2" diagonal) TFT LCD
Backlight		LED, full array		
Max. Resolution		3,840 × 2,160 pixels		
Max. Display Colors (approx.)		1,070 million colors		
Pixel Pitch (HxV)		0.315 × 0.315 mm	0.2854 × 0.2854 mm	0.2451 × 0.2451 mm
Max Brightness *1		700 cd/m ²		
Contrast Ratio		5,000 : 1	4,000 : 1	1,200 : 1
Viewing Angle(H/V)		178°/178° (CR ≥ 10)		
Active Screen Area(W×H)		47 5/8" × 26 13/16"	43 1/8" × 24 1/4"	37 1/16" × 20 13/16"
Response Time		8ms (grey to grey, avg.)		
Computer Input		Analog RGB (0.7 Vp-p) [75Ω]		
Synchronization		Horizontal/vertical separation (TTL: positive/negative)		
Plug & Play		VESA DDC2B		
Input Terminals*2		Mini D-sub 15-pin × 1, HDMI × 3		
Audio		3.5mm mini stereo jack × 1		
Serial (RS-232C)		D-sub 9 pin × 1		
Output Terminals*2		-		
Video		RCA pin (L/R) × 1		
Audio		D-sub 9 pin × 1		
Serial (RS-232C)		-		
USB Port		USB port (2.0-compliant) × 1		
LAN Terminal		10Base-T/100Base-TX		
Speakers Output		10W + 10W		
Power Requirement		AC 100 - 240 V, 50/60 Hz		
Mounting		4 points, 400 × 400 mm pitch, M6 screw		4 points, 200 × 200 mm pitch, M6 screw
Environmental Conditions		32°F to 104°F (0°C to 40°C)		
Operating Temperature *3		20% to 80% (no condensation)		
Operating Humidity		-		
Power Consumption (Input signal waiting state/standby mode*4)		190 W (1W / 0.5W)	150 W (1W / 0.5W)	140 W (1W / 0.5W)
Dimensions (approx.)		48 7/8" × 2 1/2" × 28 1/16"	44 7/16" × 2 1/2" × 25 9/16"	38 5/16" × 2 1/2" × 22 1/8"
Weight (approx.)		39.7 lbs	33.1 lbs	25.4 lbs


*1 Brightness depends on input mode and other picture settings. Brightness level will decrease over time. Due to the nature of the equipment, it is not possible to precisely maintain a constant level of brightness. *2 Use a commercially available connection cable for PC and other video connections. *3 When using the monitor lying flat on a surface (or when the monitor is tilted more than 20 degrees upward or downward from the perpendicular in relation to a level surface) the ambient temperature must be within the range of 0°C to 30°C. Temperature conditions may change when using the monitor together with optional equipment. In such cases, check the temperature conditions specified by the optional equipment. *4 No optional part is attached.

Specifications


PN-HS551

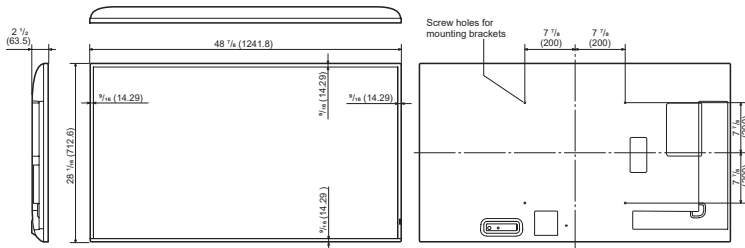

PN-HS501

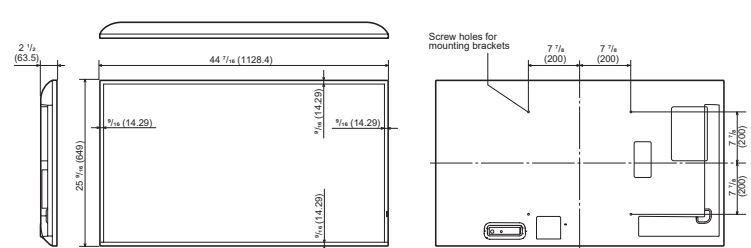


PN-HS431

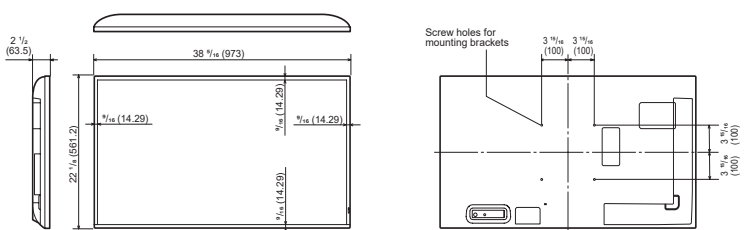

Input/Output Terminals


Bottom

(when placed horizontally)



Left side*

(when placed horizontally)
* When viewed from the front

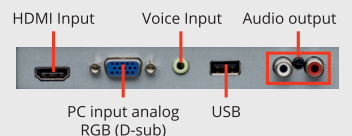

Units: inch (mm)

Design and specifications are subject to change without prior notice.

SHARP

©2022 Sharp Electronics Corporation. All rights reserved.

Sharp is a registered trademark of Sharp Corporation and/or its affiliated companies. The terms HDMI, HDMI High-Definition Multimedia Interface and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc. All other brand names and product names may be trademarks or registered trademarks of their respective owners.

Pulse Technology
(888) 357-4277

HDMITM
HIGH DEFINITION MULTIMEDIA INTERFACE

PULSE
TECHNOLOGY